

■主要用途

- AC、DC 用共模噪声对策
- 零相电抗器用

■特点


- 与 FL 系列相比，在宽频范围内的也可确保高阻抗。



◆磁芯一般规格

磁芯型号	有效横截面 面积 cm ²	平均磁力 电路长度 cm	重量 g	公称尺寸			电感系数(AL值) [μH] 100kHz at 0A
				φ D mm	φ d mm	W mm	
LRF251510MKCX	0.41	6.38	25	28.3	12.7	12.3	25.2
LRF251515MKCX	0.63	6.38	35	28.3	12.7	17.5	38.1
LRF322015MKCX	0.69	8.09	50	35.2	17.5	17.3	33.1
LRF372315MKCX	0.83	9.33	70	40.5	19.5	18.0	34.7
LRF462715MKCX	1.14	11.47	110	49.4	22.7	18.0	38.7
LRF462725MKCX	1.90	11.47	165	49.4	22.7	28.0	64.6
LRF624520MKCX	1.36	16.81	200	66.0	41.0	24.0	31.5

◆磁芯外形图

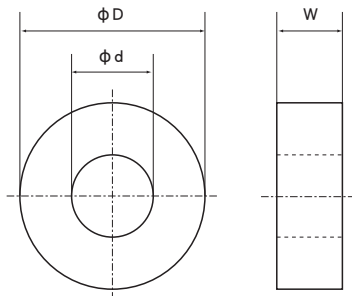


磁芯外径: φ D
磁芯内径: φ d
磁芯宽度: W


FL-V 系列

◆阻抗的频率特性


●LRF251510MKCX

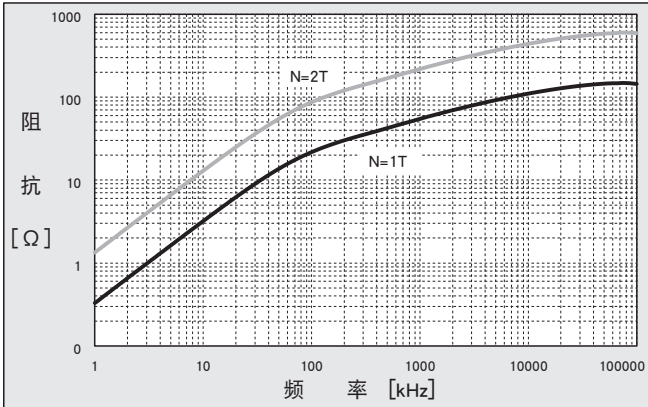


●LRF251515MKCX

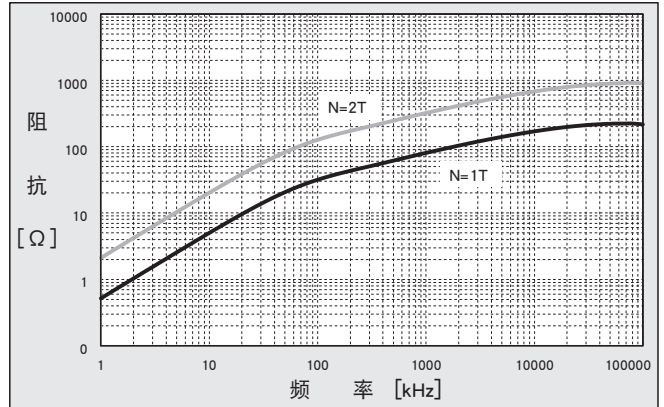


●LRF322015MKCX

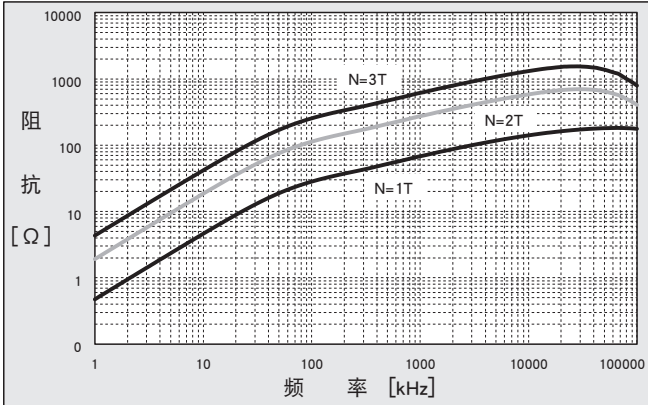


●LRF372315MKCX

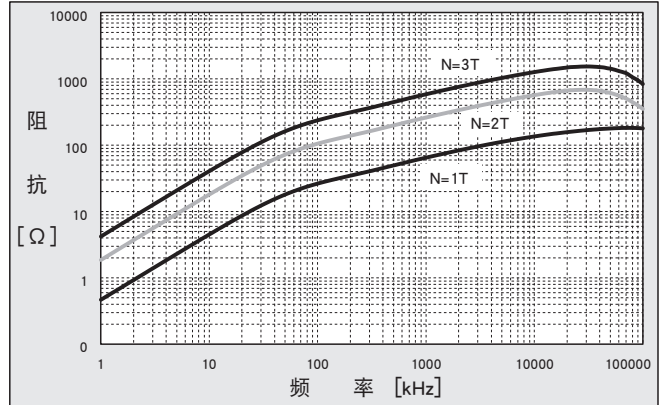

●LRF462715MKCX

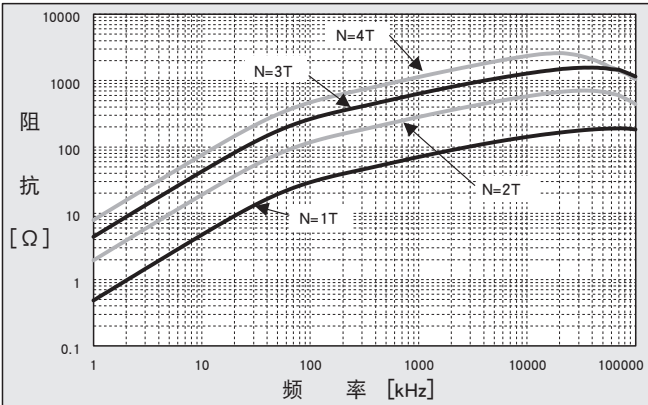

●LRF462725MKCX

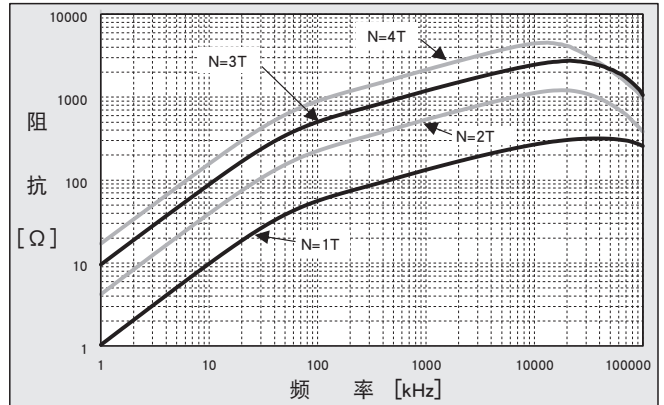

●LRF624520MKCX

